

## CYCLONE SPEEDZONE








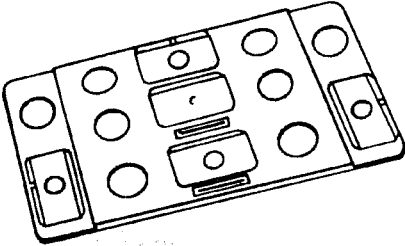

### BEFORE YOU BEGIN ...

1. Unpack the parts. Save the packing materials.
2. Match the parts to the drawings below.
3. If you have each part, put a check in the box next to the picture of the part. Look in the carton again and check all of the packing materials to make sure you haven't missed anything.



**WARNING:**

**CHOKING HAZARD** - Small parts.  
Not for Children Under 3 Years



CHECK LIST		
<input type="checkbox"/> FLEXI-CURVE (2)  		<input type="checkbox"/> DARDA RACER (1)  
<input type="checkbox"/> TRACK JOINERS (2)  	<input type="checkbox"/> LOOP HALVES (8)  	<input type="checkbox"/> 14" STRAIGHT TRACK (2)  
<input type="checkbox"/> TRACK JOINERS (2)  	<input type="checkbox"/> BASEPLATE (2)  	<input type="checkbox"/> LOOP JOINERS (8)  

### IF A PART IS MISSING OR DAMAGED ...

The store where you purchased this item does not have parts. You will get the easiest service from **Darda, A Division of Life-Like Products, LLC**. Tell us the part(s) needed and be sure to include your name and address printed clearly. Mail to **DARDA / 1600 Union Avenue / Baltimore, MD 21211 / ATTN: Dock 2**

## Using Track Joiners



Slide the Track Joiner - with the raised edges facing down - half way into the channel on the underside of the track piece. Now slide the adjoining track piece over the open half of the joiner, so that it meets the first piece. Be sure the tracks meet with no gaps.

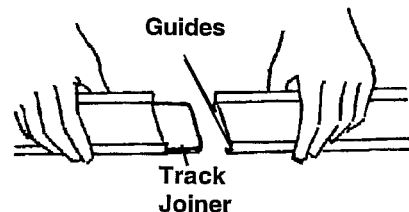

## STEP 1 - Making Loops

Put two loop halves together so that the pins at the top of each loop half go into the proper holes, creating a tight fitting seam between the two loop halves.

Holding the loop halves together, slide one loop joiner over one end of the seam and the other loop joiner over the other end of the seam.

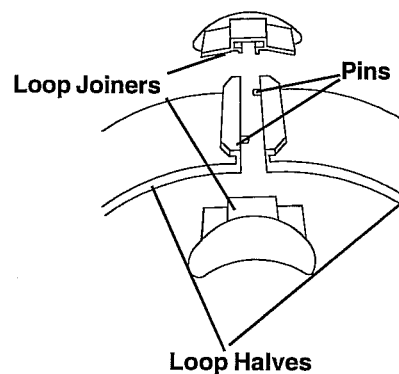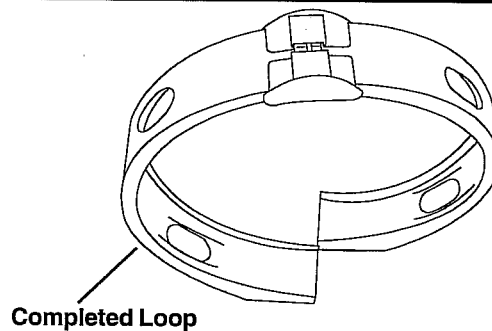

**\*IMPORTANT: Make the 8 Loops in this set before building the track.**

## STEP 2 - Attaching the straight and flexi-tracks to the large baseplates.


Refer to figure 1

Position the **large baseplates** as shown in figure 1. Attach the **14" Straight track** to the built in **track joiners** on **baseplate 1** and **baseplate 2** by sliding the ends over half of the built in **track joiners**.

Next, connect the **flexi-curves** to the front of the **baseplate** the same way as the **straight track**.

## STEP 2 (continued)


Then, add a 14" **straight track** between two **flexi-curves** using the **track joiners**. Your track should now look like figure 1.

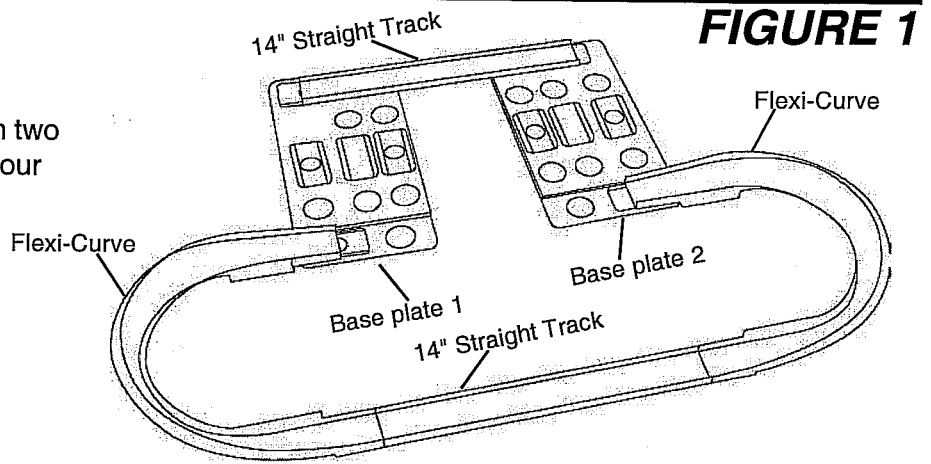

## STEP 3 Attach the loops.

Referring to the diagram, attach loops A and B to base plates 1 and 2 respectively.

Next, slide open end of loop C over the open half of the built in track joiner parallel to the 14" straight track. Repeat this step with loop D, attaching one end so it joins to the other end of the 14" straight track.

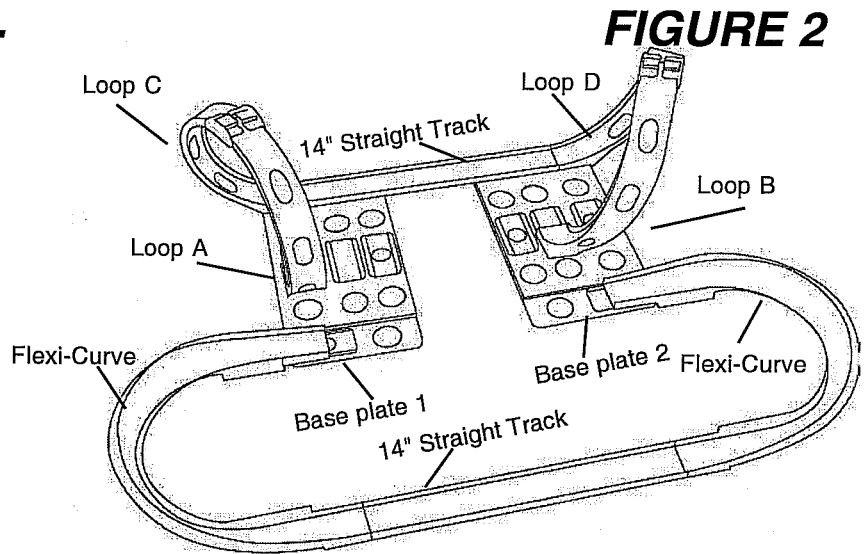


## STEP 3

Complete the track layout by attaching loop E to the other side of the base plate track joiner of loop A.

Then, attach loop F to the open end of the base plate 1 track joiner that the flexi-curve is attached to.

Attach loop G to the other side of the base plate track joiner of loop B.


Then, attach loop H to the open end of the base plate 2 track joiner that the flexi-curve is attached to. Be sure there are no gaps and that the track joiners are completely covered. Your completed track should look like figure 3.

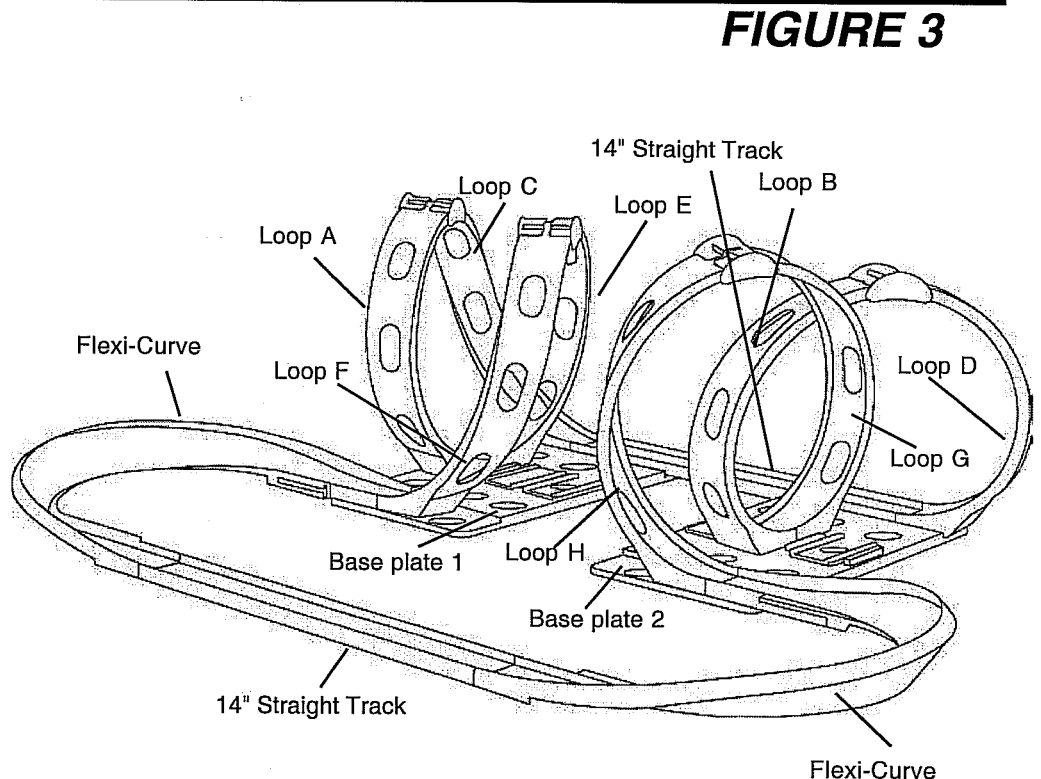


## STEP 4 - Get set, go!

Place your vehicle on the track where indicated in **FIGURE 3**


1. Press down on vehicle body until you hear a click.



2. While still pressing down, roll vehicle back & forth until the clicking sound gets louder.



3. Lift your hand up off the vehicle while rolling forward. Watch it go!




### Tips

- Be sure that the vehicle is fully wound by listening for the click to get louder before releasing it.
- Have fun with your Darda vehicles on or off the Darda track. For longer life **do not** run on carpet.
- Replacement motors are available at your local specialty toy store; or contact Darda at the address on page 1 of these instructions.

## ALTERNATE TRACK LAYOUTS

Create this exciting track layout with the pieces in this set.

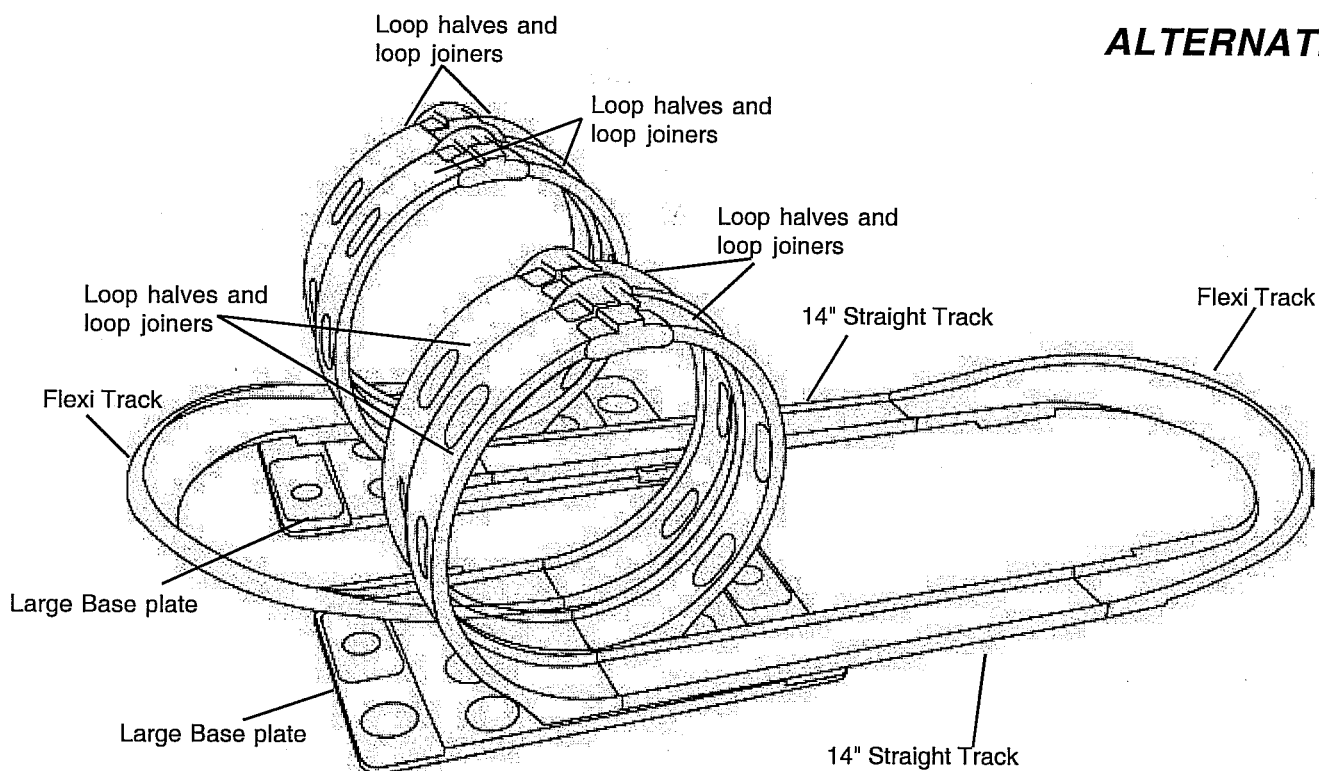

**ALTERNATE**

### TRACK TIPS

- Read all assembly instructions carefully.
  - If your vehicle has trouble making it around the track, try the following: 1) Be sure that all track seams meet and connections are secure. Track pieces must meet flush against each other where they are connected with track and loop joiners, without gaps or bumps at the joint. 2) It may be necessary to play with, adjust, or slightly bend loops in track layouts to maximize performance. Remember Darda track is flexible.
  - Darda track layouts can be set up on any flat surface. While it is not ideal, your track can be set up on carpet. We do recommend dusting off the track before use so that the dust particles from the carpet do not jam the motor. We do not recommend running the vehicle itself on carpet.
- Double check your assembly instructions, if you still have difficulty we want to help! Call our toll free consumer hotline... 1-800-638-1470. (Mon.-Fri., 9:00A.M.-3:30P.M. (Eastern Standard Time))