



ITEM NO. 11180

FIREBALL CLIMB



BEFORE YOU BEGIN ...



WARNING: CHOKING HAZARD

Contains small parts. Not for children under 3 years.


1. Unpack the parts. Save the packing materials.
2. Match the parts to the drawings below.
3. If you have each part, put a check in the box next to the picture of the part. Look in the carton again and check all of the packing materials to make sure you haven't missed anything.




4 - LOOP HALVES



4 - LOOP JOINERS




3 - TRACK JOINERS



2- 14" STRAIGHT TRACKS




2- STACKING BRIDGES




1 - FLEXI CURVE

1 - DARDA CAR (not pictured)



1 - LARGE BASE PLATE



1- 40" FLEX TRACK



1- 7" CURVE TRACK

IF A PART IS MISSING OR DAMAGED ...

The store where you purchased this item does not have parts. You will get the easiest service from **Darda**. Tell us the part(s) needed and be sure to include your name and address printed clearly. Mail to: **DARDA**/ 1600 Union Avenue / Baltimore, MD 21211 / ATTN: Dock 2

STEP ONE - Make 2 loops.

- To make each loop, put two loop halves together so that the pins at the top of each loop half go into the proper holes, creating a tight fitting seam between the two loop halves.
- Holding the loop halves together, slide one loop joiner over one end of the seam and the other loop joiner over the other end of the seam.
- Repeat this step to make two loops from the 4 loop joiners and 4 loop halves in this set.

loop joiners

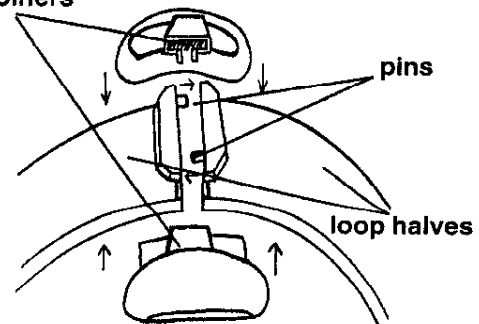


FIGURE 1

STEP TWO - Attach bridges to large baseplate.

Refer to FIGURE 2

- Attach the first **stacking bridge** to the slots on the top of the **large base plate**, by squeezing the bridge together and pushing the tabs into the slots at the top of the base plate. The bridge will snap into a locked position.

- Next, slide the second stacking bridge into the slots of the first.

(Note, the direction of the hole on the two stacking bridges will be facing opposite ways.)

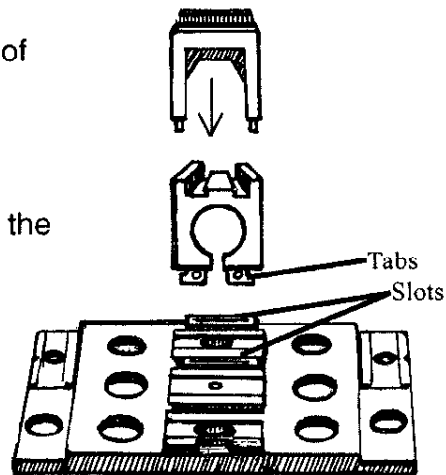


FIGURE 2

STEP THREE - Attach the Flex Track and 7" Curve.

Refer to FIGURE 3

- Place the **base plate** down as shown in figure 2. Attach the **7" curve track** to the top of the bottom stacking bridge. The curve should be facing as shown.

- Locate the **40" flex track**, attach one end to the same stacking bridge that the **7" curve track** is on. The two should meet in the middle of the bridge. Use the flex track to make a loop, and attach to the built in track joiner on the **base plate**, facing the opposite way.

40" Flex Track

7" Curve Track

Large Baseplate

FIGURE 3

STEP FOUR - Attach a loop

Refer to FIGURE 4

- Slide a **track joiner** onto the end of the **7" curve track**. Attach one end of the **loop** to this track joiner. Attach the other end of the loop to the top **stacking bridge**.

- Your track should now look like figure 4.

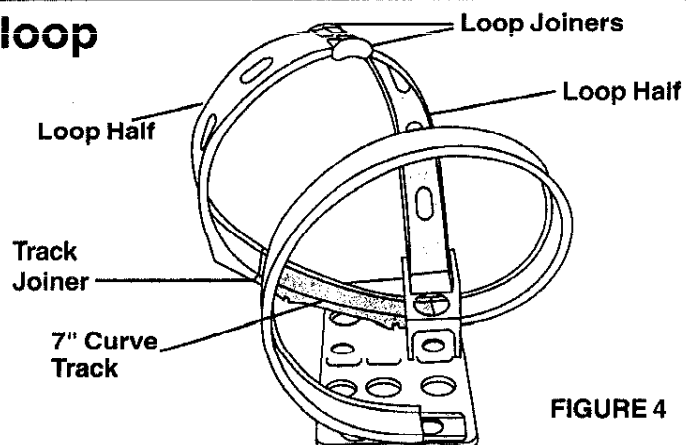



FIGURE 4

STEP FIVE - Attach the second loop

Refer to FIGURE 5

- Take the remaining **loop** and attach it to the second bridge, so it joins the first loop. Then feed it under the first loop and attach it to the **base plate**, as shown in figure 4.


- Your track should now look like figure 5.

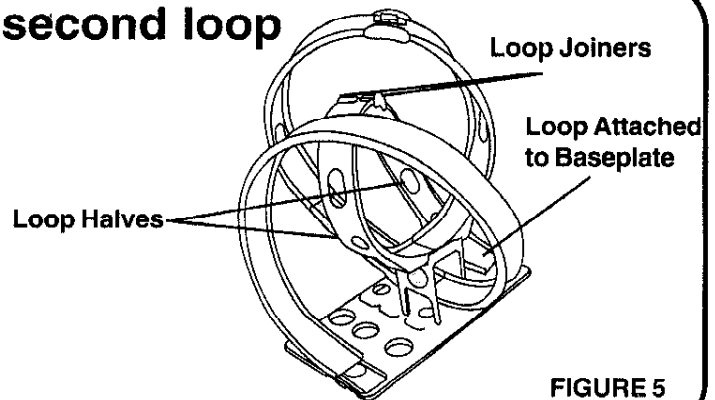

STEP SIX - Complete the circuit

Refer to FIGURE 6




- Connect a **14" straight track** to the end of the flex track on the base plate. Attach another **14" straight track** to the loop on the other side of the **base plate**. Then use the remaining **track joiners** to attach the **flexi curve** to the ends of the **14" straight tracks**. See **FIGURE 6**.

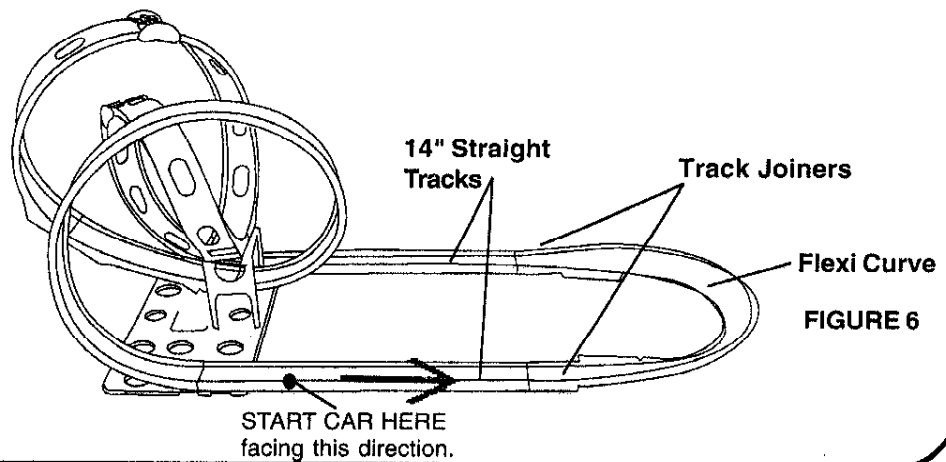

STEP SEVEN - Get set, go!

Place your car on the track as indicated in **figure 6** above.

1. Press down on car body until you hear a click.
2. While still pressing down, roll car back & forth until the clicking sound gets louder.
3. Lift your hand up off the car while rolling forward. Watch it go!




Tips

- Be sure that the car is fully wound by listening for the click to get louder before releasing it.
- Have fun with your Darda cars on or off the Darda track. For longer life **do not** run cars on carpet.
- Replacement motors are available at your local specialty toy store; or contact Darda at the address on page 1 of these instructions.


ALTERNATE TRACK LAYOUTS

Create the two track layouts below from the pieces in this set.
(One Track Joiner will be left over in each alternate layout.)

Alternate #1

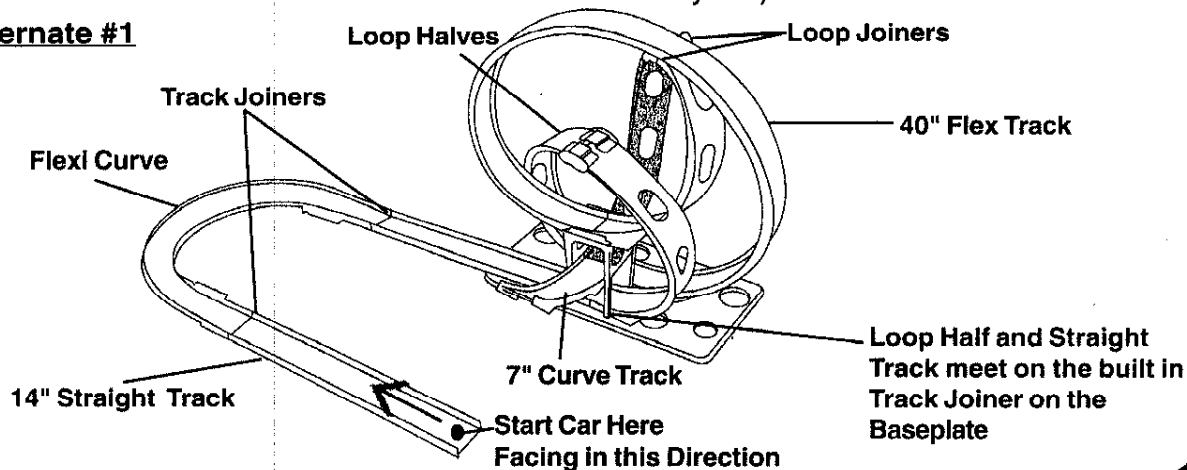

Alternate #2

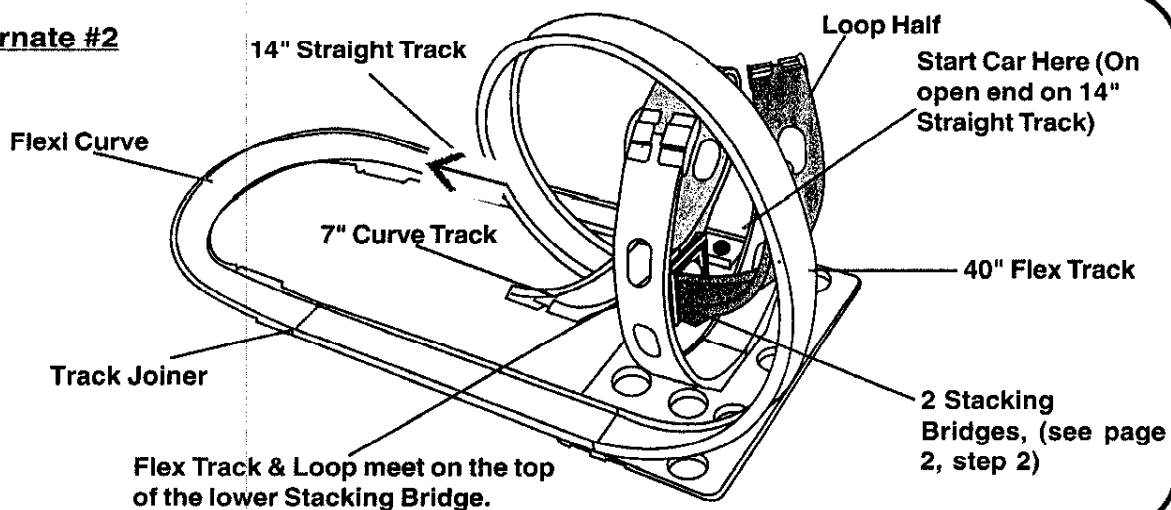

TRACK TIPS

- If your car has trouble making it around the track at first try the following
 1. Be sure that all track seams meet and connections are secure. Track pieces must meet flush against each other where they are connected with track and loop joiners, without gaps or bumps at the joints.
 2. It may be necessary to play with, adjust, or slightly bend loops in track layouts to maximize performance. Remember Darda Track is flexible.
- Darda track layouts can be set up on any flat surface. While it is not ideal, your track can be set up on carpet. We **do** recommend dusting off the track before use so that dust particles for the carpet do not jam the motor in your car. We **do not** recommend running the car itself on carpet.

PROBLEMS ?

Double check your assembly instructions, if you still have difficulty we want to help! Call our toll-free consumer hotline ... **1-800-638-1470**. Mon. - Fri., 9:00 A.M. - 3:30 P.M. (Eastern Standard Time)